

YOU WILL BE CHARGED FOR COLOR COPIES UNLESS YOU MAKE ARRANGEMENTS FOR B/W WITH A HIATT PRINTING REPRESENTATIVE PRIOR TO SENDING YOUR JOB TO BE PRINTED.

Checking the operating systems supported by the printer driver

The following lists the printer drivers included on the CD-ROMs supplied with this machine and the supported operating systems.

Printer driver	Page description language	Supported Operating Systems
PostScript PPD driver (PS-PPD)	PostScript 3 Emulation	Mac OS 9.2 or later Mac OS X 10.2.8/10.3/10.4/10.5/10.6/10.7/10.8

Installing the printer driver

Install the printer driver using the installer.

- Before installation, exit all application software programs that are running.
1. **Connect your computer to the hiatt Wi-Fi Network.**
 2. **Go to www.hiattprinting.com**
 - On the left hand side of the page click **Printing Tools**
 - Select the **bizhub C654 Driver** for your version of Mac OS X. Download the driver to your desktop.
 3. **Copy the driver file onto the desktop according to the Mac OS X version.**
 - a. Mac OS X 10.2: bizhub_C754_102.pkg
 - b. Mac OS X 10.3: bizhub_C754_103104.pkg
 - c. Mac OS X 10.4: bizhub_C754_103104.pkg
 - d. Mac OS X 10.5: bizhub_C754_105.pkg
 - e. Mac OS X 10.6: bizhub_C754_106.pkg
 - f. Mac OS X 10.7: bizhub_C754_107.pkg
 4. **Double-click the file copied onto the desktop.**


The printer driver installer starts.



5. Click [Continue] following the instructions on the pages that follow until the [Install] page appears.
 - a. When the name and password prompt appears during the procedure, enter the administrator name and password.

6. Click [Install].

The printer driver is installed in the computer.

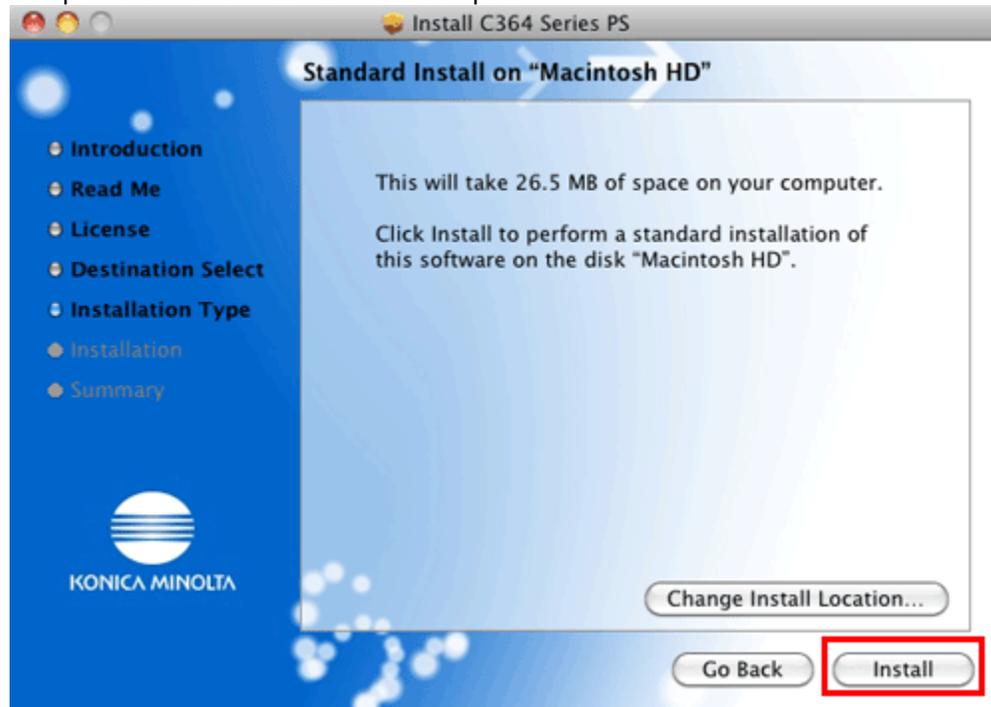

7. Click [Close].

This completes the installation process of the printer driver. **Next, add the printer to the computer.**

Configuring connection using Bonjour (Mac OS X 10.4/10.5/10.6/10.7/10.8)


Add the printer automatically detected by Bonjour to the computer.

1. Select [System Preferences...] in the Apple menu.
2. Click the [Print & Fax] or [Print & Scan] icon.
3. Click [+] on the [Print & Fax] or [Print & Scan] window.
 - In Mac OS X 10.4/10.5/10.6, go to Step 4.
 - In Mac OS X 10.7/10.8, if a target printer name is found in the list displayed by clicking [+], select it. When a printer driver is selected automatically, the printer addition is completed. If a target printer name is not found, select [Add Other Printer or Scanner...] or [Add Printer or Scanner...], and go to Step 4.
4. Click [Default].

Connected printers are detected.

- If no printers are detected, restart this machine.

5. From the [Printer Name] list, select the KONICA MINOLTA bizhub C654 for a Bonjour connection.
 - To change the printer name, select [Utility] - [Administrator Settings] - [Network Settings] - [Bonjour Setting] on this machine.

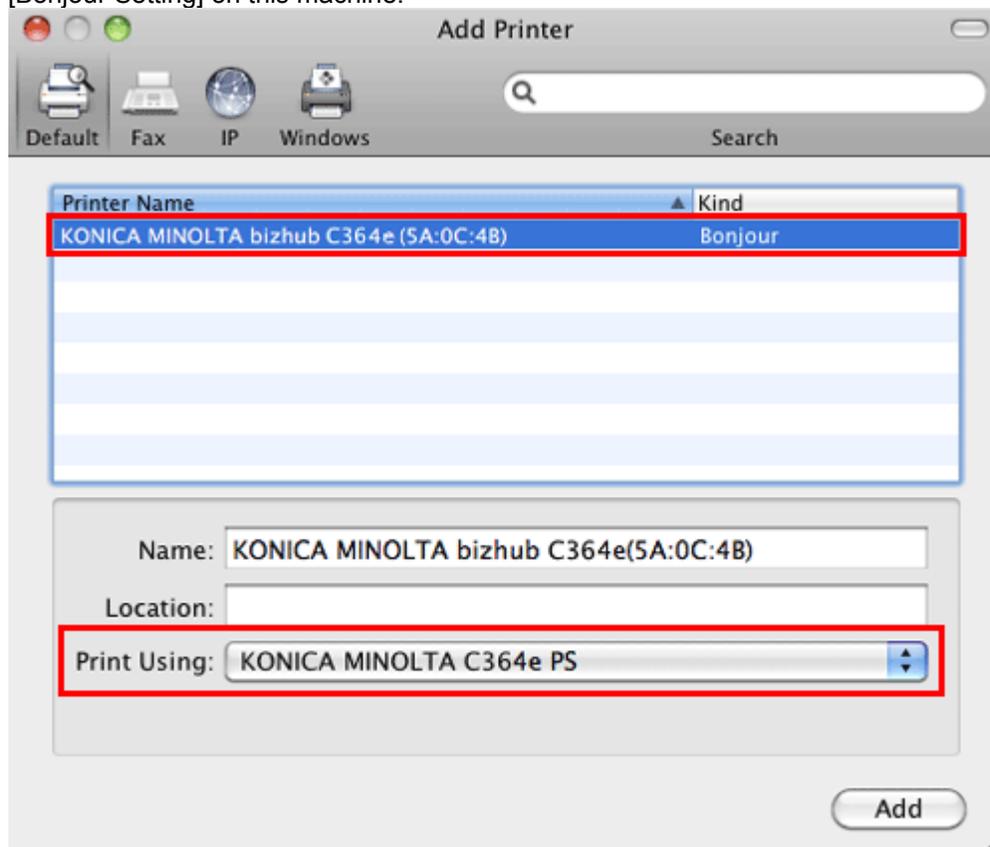

The printer driver for the KONICA MINOLTA bizhub C654 is displayed in [Print Using:].

- When the printer driver is displayed, go to Step 7.
- When the printer driver is not correctly displayed, go to Step 6.

6. Manually select the printer driver.

- In Mac OS X 10.6/10.7/10.8, select [Select Printer Software...] from [Print Using:], then click the driver of the KONICA MINOLTA bizhub C654 from the list that is displayed in another window.
- In Mac OS X 10.5, select [Select a driver to use...] in [Print Using:], then click the driver of the KONICA MINOLTA bizhub C654 from the list.
- In Mac OS X 10.4, select [KONICA MINOLTA] in [Print Using:], and then click the driver of the KONICA MINOLTA bizhub C654 from the list.

7. Click [Add].

This completes the addition process of the printer. Then, proceed to the [Installable Options] window to configure the optional environment for this machine.

YOU WILL BE CHARGED FOR COLOR COPIES UNLESS YOU MAKE ARRANGEMENTS FOR B/W WITH A HIATT PRINTING REPRESENTATIVE PRIOR TO SENDING YOUR JOB TO BE PRINTED.

Configuring connection using Rendezvous (Mac OS X 10.2/10.3)


Add the printer automatically detected by Rendezvous to the PC.

1. From [Macintosh HD] (system hard disk) - [Applications] - [Utilities], double-click [Printer Setup Utility] or [Print Center] to open it.
2. When the [You have no printers available.] window appears, click [Add].
When the [Printer List] appears, click [Add].
 - If available printers have already been specified, the [You have no printers available.] window does not appear.
3. Select [Rendezvous] as the connection method.

Connected printers are detected.


- If no printers are detected, restart this machine.

4. From the [Name] list, select the KONICA MINOLTA bizhub C654 for Rendezvous connection.
 - To change the printer name, select [Utility] - [Administrator Settings] - [Network Settings] - [Bonjour Setting] on this machine.

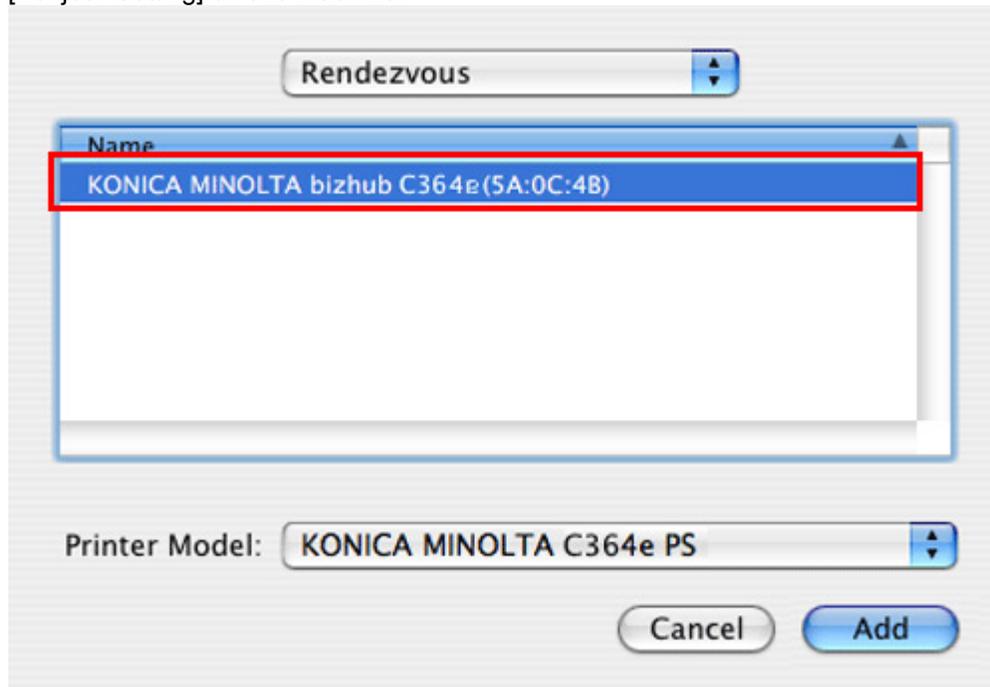

5. Manually select the printer driver.

- In [Printer Model:], select [KONICA MINOLTA], then click the driver of the KONICA MINOLTA bizhub C654 from the model list.

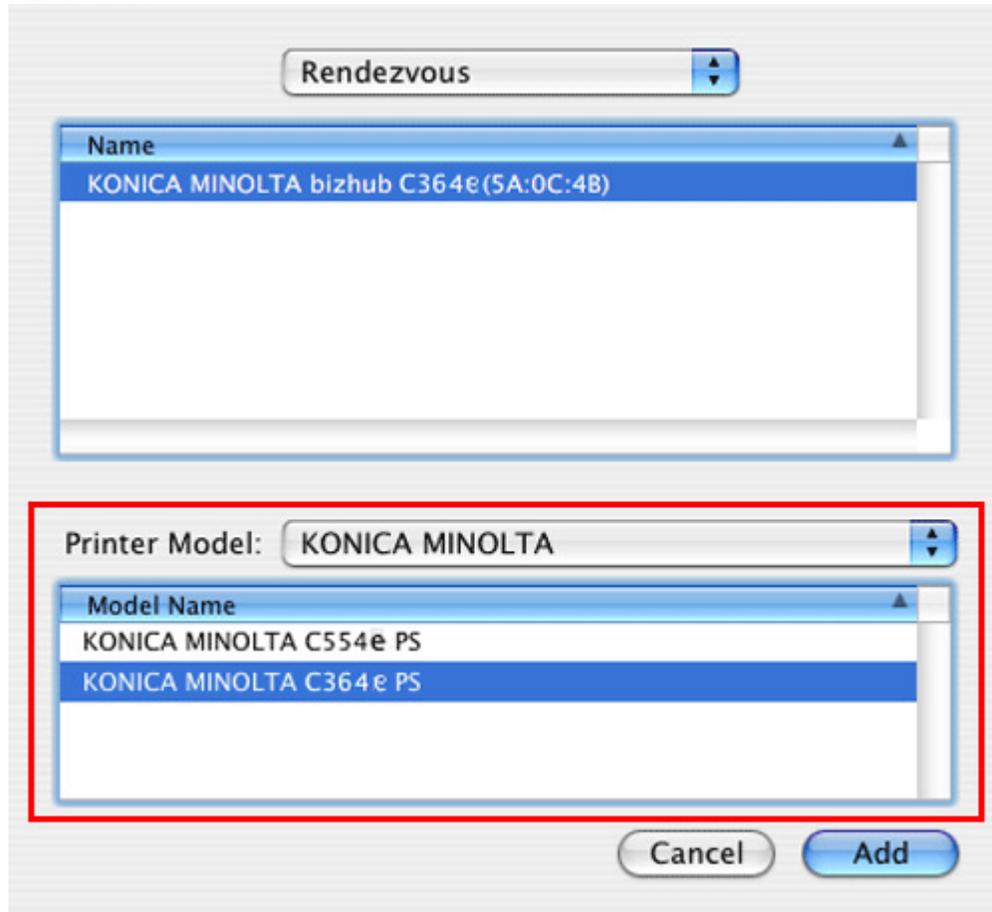**6. Click [Add].**

This completes the addition process of the printer. Then, proceed to the [Installable Options] window to configure the optional environment for this machine.

YOU WILL BE CHARGED FOR COLOR COPIES UNLESS YOU MAKE ARRANGEMENTS FOR B/W WITH A HIATT PRINTING REPRESENTATIVE PRIOR TO SENDING YOUR JOB TO BE PRINTED.